

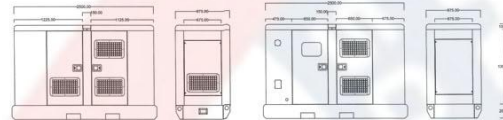
**TP110**

Standby power : 110KVA/88KW

Prime power : 100KVA/80KW

**Standard features**

- Engine : PERKINS , 1104C-44TAG2
- Charge alternator : 12V
- Governor : Electrical
- Generator : LEROY SOMER LSA/TAL044D
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 12V battery and cable
- Industrial muffler
- User's manual

**Weight and Dimensions**

GEN-SET-TP100	Dimensions (L X W X H)	Weight
Open type	1800mm X 820mm X 1460mm	1149Kg
Silent type	2500mm X 975mm X 1700mm	1771Kg

**Generator Ratings**

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	159	110/88	100/80

**Engine Data**

Manufacturer/Model	PERKINS 1104C-44TAG2 4-cycle
Cylinder /Arrangement	4 / L
Displacement	4.4 L
Bore and Stroke	105 mm X 127 mm
Compression ratio	17.25 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	103 KW
Frequency regulation , steady state	± 0.5%
Governor : type	Electrical

**Exhaust System**

Exhaust gas flow	16.3 m <sup>3</sup> /min
Exhaust temperature	543 °C
Max back pressure	18 kPA

**Fuel System**

Fuel consumption 100% (of the Prime Power)	22.6 L / h
--	------------

**Oil system**

Total oil capacity w/filters	8 L
------------------------------	-----

**Air intake**

Engine air flow	6.27 m <sup>3</sup> /min
-----------------	--------------------------

**Coolant System**

Radiator & engine capacity	12.6 L
Max water temperature	110°C
Thermostat	82-93°C

**Generator Data**

Manufacturer / Type	LEROY SOMER LSA/TAL044D
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	Brushless SHUNT
Insulation : class , temperature rise	H / H
protection	IP23

**Control panel**

The DSE7320 is made by DEEPSEA in England and is a new control module for single gen-set applications, and it is an Automatic Star Control Module and is simple to operate. and the module includes USB, RS232 and RS485 for expansion device connectivity

Specifications: Frequency meter, Ammeter, Voltmeter  
Alarms and faults Oil pressure, water temperature, No start-up, Overspeed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop. Connect to VOLVO J1939

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.