




TP66

Standby power : 66KVA/53KW

Prime power : 60KVA/48KW

Standard features

- Engine : PERKINS , 1103A-33TG2
- Charge alternator : 12V
- Governor : Electrical
- Generator : LEROY SOMER LSA/TAL042H
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 12V battery and cable
- Industrial muffler
- User's manual

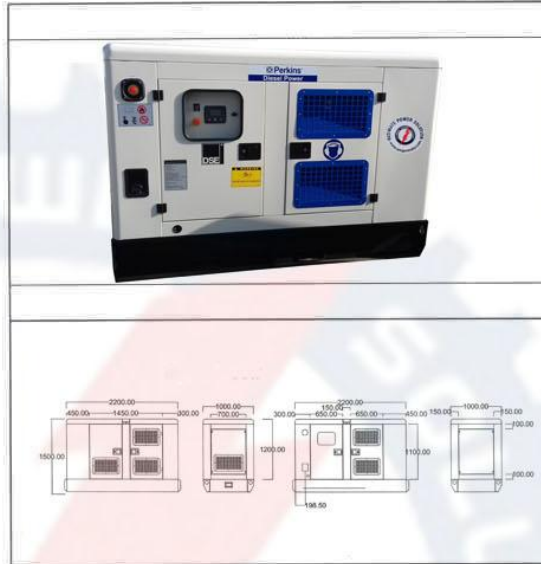

Weight and Dimensions

GEN-SET-TP60	Dimensions (L X W X H)	Weight
Open type	1740mm X 820mm X 1300mm	969Kg
Silent type	2200mm X 1000mm X 1500mm	1358Kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	96	66/53	60/48

Engine Data

Manufacturer/Model	PERKINS 1103A-33TG2 4-cycle
Cylinder /Arrangement	3 / L
Displacement	3.3 L
Bore and Stroke	105 mm X 127 mm
Compression ratio	17.25 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	60.5 KW
Frequency regulation , steady state	± 0.75%
Governor : type	Electrical

Exhaust System

Exhaust gas flow	10.4 m³/min
Exhaust temperature	571 °C
Max back pressure	10 kPa

**Fuel System**

Fuel consumption 100% (of the Prime Power)	13.9 L / h
--	------------

Oil system

Total oil capacity w/filters	8.3 L
------------------------------	-------

Air intake

Engine air flow	3.9 m ³ /min
-----------------	-------------------------

Coolant System

Radiator & engine capacity	10.2 L
Max water temperature	110°C
Thermostat	82-93°C

Generator Data

Manufacturer / Type	LEROY SOMER LSA/TAL042H
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	Brushless SHUNT
Insulation : class , temperature rise	H / H
protection	IP23

Control panel

The DSE701 is made by DEEPSEA in England and is a new control module for single gen-set applications, and it is an Automatic Star Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity

Specifications: Frequency meter, Ammeter, Voltmeter
Alarms and faults Oil pressure, water temperature, No start-up, Overspeed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop. Connect to VOLVO J1939

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.