ULTIMATE POWER SOLUTION (FZC)

The world's best dealer for Power Generation, Control System, & Power Solution

POWERED BY: Perkins | LEROY SOMER ALTERNATOR

15 KVA 3 PHASE — **50 Hz**

60 Hz — **18 KVA** 3 PHASE

GENERATING SET MODEL (UPSP15)

Output Ratings	Prime	Standby
380-415 V, 3ph, 50 Hz, 1500 rpm	15 KVA	17 KVA
	12 KW	13 KW
380-415 V, 3ph, 60 Hz, 1800 rpm	18 KVA	20 KVA
	14 KW	16 KW

ENGINE / TECHNICAL DATA

Ratings at 0.8 Power Factor

Engine Make		PERKINS	
Engine Model		403A-15G2	
Governing Type		Mechanical	
Number of Cylinder/ Arrangement		3/ Vertical in-line	
Bore and Stroke (mm)		84 mm x 90 mm	
Compression Ratio		22.5 : 1	
Displacement (L)		1.5 L	
Aspiration/ Cooling		Naturally Aspirated/ Water cooled	
Combustion System		Indirect Injection	
Rotation from Flywheel End		Anti-clockwise	
Total Lubrication System Capacity		6 L	
Total Coolant Capacity		6 L	
Cycle		4 stroke	
Frequency and Engine Speed		50 Hz / 1500 rpm	60 Hz / 1500 rpm
Fuel Consumption	**@50% load**	2.24 L/hr	
	@75% load	3.11 L/hr	
	@100% load	4.3 L/hr	
	@110% load	5.04 L/hr	
Exhaust temperature		470°C	580°C

ALTERNATOR

Make	UPS / Leroy Somer (TAL)
Model	UPS164G/ TAL040D
No. of bearings	1
Insulation	H
Coupling	Direct
Exciter Type	SHUNT
Wires	6/12
Degree of protection	IP23
Winding Pitch	2/3
Overspeed	2250 mn^{-1}
Voltage Regulation	±1%

CONTROL PANEL

Make	DeepSea
Model	4110/20 SERIES

The DSE 4110/20 Seeries., is an Auto Start Control for single genset application. It includes a LCD display which clearly shows the status of engine all the times. This module can either programmed using the front panel or by using configuraton sale PC software.

Metering and Alarm Indications:

- Generator frequency
- UnderSpeed, Overspeed
- Generator volts (L-L, L-N)
- Generator current
- Engine oil pressure
- Engine coolant temperature
- Hours run counter
- Battery volts
- Fail to start/stop
- Emergency stop
- Failed to reach loading voltage/frequency
- Charge fail
- LOW DC voltage
- CAN diagnostic and CAN fail/error





CERTIFIED BY:

IEC | UL CERTIFIED | ISO 9001:2015 | ISO 14001:2015 | CE MARK CERTIFICATION IQS | RoHS COMPLIANT

Tel: +971 6 5570722
Fax: +971 6 5570733
P.O. Box: 122333
F3-18, Sharjah Airport Free Zone (SAIF Zone)
E-mail: info@upsgenerator.com
Web: www.upsgenerator.com

STANDARD SPECIFICATIONS

15 KVA
3 PHASE
50 Hz

60 Hz
18 KVA
3 PHASE

1. ENGINE

Perkins four stroke heavy duty high performance industrial type diesel engine.

2. ENGINE FILTERATION SYSTEM

- Cartridge type dry air filter.
- Cartridge type fuel filters.
- Full flow lube oil filter.

All filters have replaceable elements.

3. COOLING RADIATOR

Radiator and cooling fan, complete with safety guards, designed to cool the engine at high ambient temperatures (consult your dealer for de-ration factors)

4. EXHAUST SYSTEM

Exhaust gas flow	2.2 m³/min
Maximum allowable back pressure	10.2 (kPa)

5. CIRCUIT BREAKER TYPE

3 pole MCCB. (4 pole is optional)

6. Fuel System

The baseframe design is incorporated with an integral fuel tank with a capacity of approx. 8 hours runningat Full Load. The tank is supplied complete with fill cap breather, fuel feed and return lines to the Engine and drain plug.

7. ALTERNATOR

7.1 INSULATION SYSTEM

- The insulation system is Class H.
- All windings are impregnated in either a triple dip thermosetting liquid, oil and acid resisting polyester varnish or vacuum pressure impregnated with a special polyesterresin.
- Heavy coat of antitracking varnish additional protection against moisture or condensation.

7.2 AUTOMATIC VOLTAGE REGULATOR (AVR)

The fully sealed Automatic Voltage Regulator maintains the Voltage Regulation at ±1%. Nominal adjustment by means of a trim pot incorporated on the AVR.

8. MOUNTING ARRANGEMENT

8.1 COUPLING

- The Engine and Alternator are directly coupled by means of an SAE flange. The Engine flywheel is flexibly coupled to the Alternator rotor.

8.2 ANTI-VIBRATION MOUNTING PADS

- Anti-Vibration pads are affixed between the Engine/ Alternator feet and the Basetrame thus ensuring complete vibration isolation of the rotating assembly.

8.3 SAFETY GUARDS

- The Fan & Fan Drive along with the Battery Charging Alternator are Safety Guard protected for personnel protection.

9. FACTORY TEST

- The Generating set is load tested before dispatch
- All protective devices control functions and site load conditions are simulated. The generator and its systems are checked before dispatch.

10. EQUIPMENT FINISHING

All mild steel components are fully degreased and painted with powder coated paint to ensure maximum scuff resistance and durability.

11. DOCUMENTATION

Operation & Maintenance manual, Circuit wiring diagrams and Commissioningl/Fault Finding instruction leaflets are accompaniedwith the Generator.

12. QUALITY STANDARDS

The equipment meets the following standards: B84999, B65000, BS5514 IEC 60034, VDE0530, NEMA MG 1.22 and ISO8528.


13. WARRANTY

All of the Generating Sets are covered under a warranty policy for a period of 12 months or 1000 working hours, Warranty of the equipment is in line with manufacturers warranty terms & conditions.
(check warranty statement for more details, as it may vary for different countries)

In line with continuous product development, we reserve the right to change specifications without notice.

STANDARD GENERATOR DIMENSION

Open type Generator:

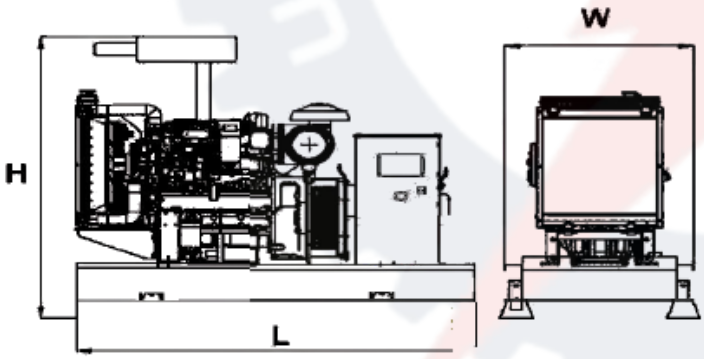


Length, L: **1350 mm**

Hehight, H: **1100 mm**

Width, W: **650 mm**

Weight: **450 kg**

Close type Generator:

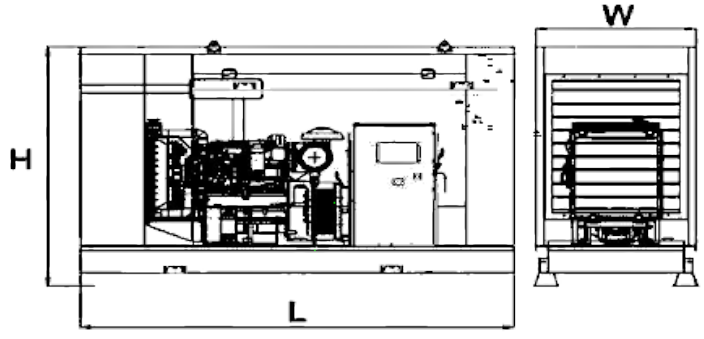

Length, L: **1780 mm**

Hehight, H: **1380 mm**

Width, W: **900 mm**

Weight: **600 kg**

Tel: +971 6 5570722
Fax: +971 6 5570733
P.O. Box: 122333
F3-18, Sharjah Airport Free Zone (SAIF Zone)
E-mail: info@upsgenerator.com
Web: www.upsgenerator.com