ULTIMATE POWER SOLUTION (FZC)

The world's best dealer for Power Generation, Control System, & Power Solution

POWERED BY: Perkins | LEROY SOMER ALTERNATOR

197 KVA 3 PHASE — **60 Hz**

50 Hz — **180 KVA** 3 PHASE

GENERATING SET MODEL (UPSP197)

Output Ratings	Prime	Standby
380-415 V, 3ph, 50 Hz, 1500 rpm	180 KVA	200 KVA
	144 KW	160 KW
380-415 V, 3ph, 60 Hz, 1800 rpm	197 KVA	217 KVA
	157 KW	173 KW

ENGINE / TECHNICAL DATA

Ratings at 0.8 Power Factor

Engine Make		PERKINS	
Engine Model		1106A-70TAG3	
Governing Type		Mechanical	
Number of Cylinder/ Arrangement		6/ Vertical in-line	
Bore and Stroke (mm)		105 mm x 135 mm	
Compression Ratio		16: 1	
Displacement (L)		7.01 L	
Aspiration/ Cooling		Turbocharged aftercooled/ Water cooled	
Combustion System		Direct Injection	
Rotation from Flywheel End		Anti-clockwise	
Total Lubrication System Capacity		18 L	
Total Coolant Capacity		21 L	
Cycle		4 stroke	
Frequency and Engine Speed		50 Hz / 1500 rpm	60 Hz / 1800 rpm
Fuel Consumption	**@50% load**	18.8 L/hr	22.2 L/hr
	@75% load	30.7 L/hr	35.7 L/hr
	@100% load	39.6 L/hr	46.4 L/hr
	@110% load	43.7 L/hr	51.7 L/hr
Exhaust temperature		471°C	419°C



ALTERNATOR

Make	UPS / Leroy Somer(TAL)
Model	UPS274G / TAL044L
No. of bearings	1
Insulation	H
Exciter Type	SHUNT
Wires	6/12
Degree of protection	IP23
Winding Pitch	2/3
Overspeed	2250 mn^{-1}
Voltage Regulation	±1%

CONTROL PANEL

Make	DeepSea
Model	6110/20 SERIES

The DSE 6110/20 Seeries., is an Auto Start Control for single genset application. It includes a LCD display which clearly shows the status of engine all the times. This module can either programmed using the front panel or by using configuraton sale PC software.

Metering and Alarm Indications:

- Generator frequency
- UnderSpeed, Overspeed
- Generator volts (L-L, L-N)
- Generator current
- Engine oil pressure
- Engine coolant temperature
- Hours run counter
- Battery volts
- Fail to start/stop
- Emergency stop
- Failed to reach loading voltage/frequency
- Charge fail
- LOW DC voltage
- CAN diagnostic and CAN fail/error

CERTIFIED BY: IEC, UL CERTIFIED, ISO 9001:2015, ISO 14001:2015, CE, RoHS COMPLIANT

Tel: +971 6 5570722
Fax: +971 6 5570733
P.O. Box: 122333
F3-18, Sharjah Airport Free Zone (SAIF Zone)
E-mail: info@upsgenerator.com
Web: www.upsgenerator.com

STANDARD SPECIFICATIONS

197 KVA
3 PHASE
60 Hz

50 Hz
180 KVA
3 PHASE

1. ENGINE

Perkins four stroke heavy duty high performance industrial type diesel engine.

2. ENGINE FILTERATION SYSTEM

- Cartridge type dry air filter.
- Cartridge type fuel filters.
- Full flow lube oil filter.

All filters have replaceable elements.

3. COOLING RADIATOR

Radiator and cooling fan, complete with safety guards, designed to cool the engine at high ambient temperatures (consult your dealer for de-ration factors)

4. EXHAUST SYSTEM

Exhaust gas flow	30.37-40.66 m³/min
Maximum allowable back pressure	6 (kPa)

5. CIRCUIT BREAKER TYPE

3 pole MCCB. (4 pole is optional)

6. Fuel System

The baseframe design is incorporated with an integral fuel tank with a capacity of approx. 8 hours runningat Full Load. The tank is supplied complete with fill cap breather, fuel feed and return lines to the Engine and drain plug.

7. ALTERNATOR

7.1 INSULATION SYSTEM

- The insulation system is Class H.
- All windings are impregnated in either a triple dip thermosetting liquid, oil and acid resisting polyester varnish or vacuum pressure impregnated with a special polyesterresin.
- Heavy coat of antitracking varnish additional protection against moisture or condensation.

7.2 AUTOMATIC VOLTAGE REGULATOR (AVR)

The fully sealed Automatic Voltage Regulator maintains the Voltage Regulation at ±1%. Nominal adjustment by means of a trim pot incorporated on the AVR.

8. MOUNTING ARRANGEMENT

8.1 COUPLING

- The Engine and Alternator are directly coupled by means of an SAE flange. The Engine flywheel is flexibly coupled to the Alternator rotor.

8.2 ANTI-VIBRATION MOUNTING PADS

- Anti-Vibration pads are affixed between the Engine/ Alternator feet and the Basetrame thus ensuring complete vibration isolation of the rotating assembly.

8.3 SAFETY GUARDS

- The Fan & Fan Drive along with the Battery Charging Alternator are Safety Guard protected for personnel protection.

9. FACTORY TEST

- The Generating set is load tested before dispatch
- All protective devices control functions and site load conditions are simulated. The generator and its systems are checked before dispatch.

10. EQUIPMENT FINISHING

All mild steel components are fully degreased and painted with powder coated paint to ensure maximum scuff resistance and durability.

11. DOCUMENTATION

Operation & Maintenance manual, Circuit wiring diagrams and Commissioningl/Fault Finding instruction leaflets are accompaniedwith the Generator.

12. QUALITY STANDARDS

The equipment meets the following standards: B84999, B65000, BS5514 IEC 60034, VDE0530, NEMA MG 1.22 and ISO8528.


13. WARRANTY

All of the Generating Sets are covered under a warranty policy for a period of 12 months or 1000 working hours, Warranty of the equipment is in line with manufacturers warranty terms & conditions.
(check warranty statement for more details, as it may vary for different countries)

In line with continuous product development, we reserve the right to change specifications without notice.

STANDARD GENERATOR DIMENSION

Open type Generator

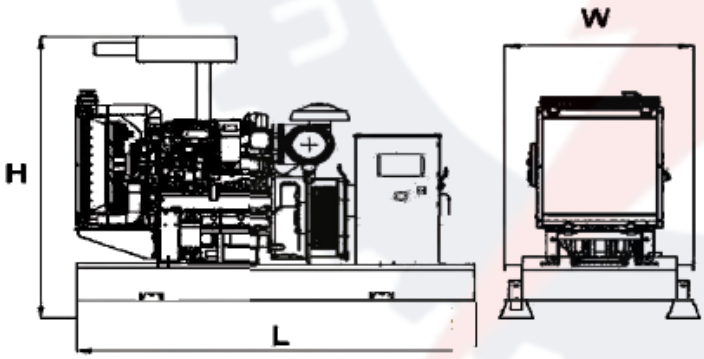


Length, L: **2440 mm**

Height, H: **1500 mm**

Width, W: **900 mm**

Weight: **1600 kg**

Close type Generator

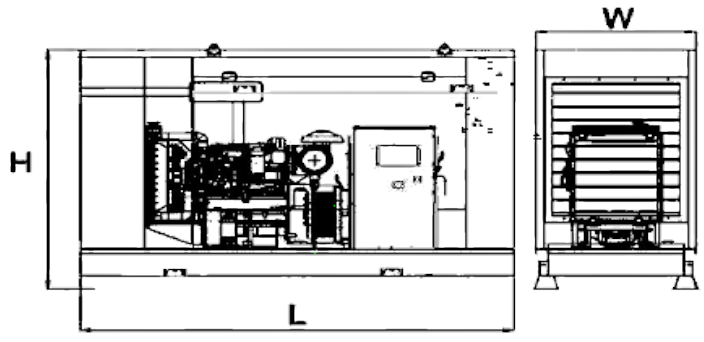

Length, L: **3320 mm**

Height, H: **1850 mm**

Width, W: **1100 mm**

Weight: **2000 kg**

Tel: +971 6 5570722
Fax: +971 6 5570733
P.O. Box: 122333
F3-18, Sharjah Airport Free Zone (SAIF Zone)
E-mail: info@upsgenerator.com
Web: www.upsgenerator.com