# ULTIMATE POWER SOLUTION (FZC) The world's best dealer on Diesel Power Generation, Control Systems & Power Solution

**POWERED BY** 





**CERTIFIED BY** 







## 13.1 KVA 3 PHASE 50 Hz

GENERATING SET MODEL (UPS P 15)		
Output Ratings	Prime	Standby
380-415 V, 3 ph, 50 Hz, 1500 rpm	13.1 KVA	14.5 KVA
	10 KW	11.6 KW
380-415 V, 3 ph, 60 Hz, 1800 rpm	15.8 KVA	17.5 KVA
	12.6 KW	13.9 KW

#### **ENGINE / TECHNICAL DATA**

Ratings at 0.8 Power Factor

Engine Make	Perkins 403A-15G1	
Engine Model		
Governing Type	Mechanical	
Number of Cylinders	3 Vertical in line 84 X 90 1.496	
Cylinder Arrangement		
Bore and Stroke mm		
Displacement / Cubic Capacity litres		
Induction System	Naturally Aspirated	
Cycle	4 stroke  Indirect Injection 22,5:1  Anti-clockwise, viewed on flywheel	
Combustion System		
Compression Ratio		
Rotation		
Cooling System	Water - cooled	
Frequency and Engine Speed	50Hz & 150 <mark>0rpm</mark>	<b>60 Hz</b> & 1800rpm
Fuel Consumption @ 50% load L/hr	2.0	2.5
@ 75% load L/hr	2.8	3.4
@ 100% load L/hr	3.7	4.4
Total Lubrication System Capacity litres	6.0	6.0
Total Coolant Capacity (inc. radiator) litres	6.0	6.0
Exhaust Temperature: °C	445	490

Image for illustrative purposes only



1	5.8	KVA
	3	PHASE

ALTERNATOR DATA		
UPS / Leroy Somer		
UPS164D / TAL 040D		
1		
s H		
4		
tion IP23		
em Shunt		
2/3		
֡		

Overspeed	2250 mn <sup>-1</sup>
Voltage Regulation (steady)	± 1%

CONTROL PANEL	
Make	Deep Sea
Model	4000 SERIES

The DSE 4000 Series is an Auto Start Control Module for single genset applications. It includes a backlit LCD display which clearly shows the status of the engine all the times. This module can either be programmed using the front panel or by using the DSE configuration suite PC

#### **Metering and Alarm indications:**

- Generator frequency
- Underspeed, Overspeed
- . Generator volts (L-L, L-N)
- Generator current
- · Engine oil pressure
- · Engine coolant temperature
- · Hours run counter
- · Battery volts
- · Fail to start/stop
- Emergency stop
- · Failed to reach loading voltage/frequency





E-mail: info@upsgenerator.com P.O.BOX: 122333 F3-18, Sharjah Airport Free Zone (SAIF ZONE) Web.: www.upsgenerator.com

## STANDARD SPECIFICATIONS

50 Hz

1. ENGINE

Perkins four stroke heavy duty high performance industrial type diesel engine.

#### 2. ENGINE FILTRATION SYSTEM

- · Cartridge type dry air filter.
- · Two Cartridge type fuel filters.
- · Full flow lube oil filter.

All filters have replaceable elements.

#### 3. COOLING RADIATOR

Radiator and cooling fan, complete with safety guards, designed to cool the engine at high ambient temperatures (consult your dealer for de-ration factors)

#### 4. EXHAUST SYSTEM

Exhaust gas flow 2.7 m^3/min Maximum allowable back pressure 10.2 (kPa)

#### 5. CIRCUT BREAKER TYPE

3 pole MCCB. (4 pole is optional)

#### 6. FUEL SYSTEM

The baseframe design is incorporated with an integral fuel tank with a capacity of approx. 8 hours running at Full Load. The tank is supplied complete with fill cap breather, fuel feed and return lines to the Engine and drain plug.

#### 7. ALTERNATOR

#### 7.1 INSULATION SYSTEM

- . The insulation system is Class H.
- All windings are impregnated in either a triple dip thermosetting liquid, oil and acid resisting polyester varnish or vacuum pressure impregnated with a special polyester resin.
- Heavy coat of antitracking varnish additional protection against moisture or condensation.

#### 7.2 AUTOMATIC VOLTAGE REGULATOR (AVR)

The fully sealed Automatic Voltage Regulator maintains the Voltage Regulation at  $\pm 1\%$ . Nominal adjustment by means of a trim pot incorporated on the AVR.

#### 8. MOUNTING ARRANGEMENT

#### 8.1 COUPLING

The Engine and Alternator are directly coupled by means of an SAE flange. The Engine flywheel is flexibly coupled to the Alternator rotor.

#### 8.2 ANTI-VIBRATION MOUNTING PADS

Anti-Vibration pads are affixed between the Engine / Alternator feet and the Baseframe thus ensuring complete vibration isolation of the rotating assembly.

#### **8.3 SAFETY GUARDS**

The Fan & Fan Drive along with the Battery Charging Alternator are Safety Guard protected for personnel protection.

## 60 Hz

15.8 KVA
3 PHASE

#### 9. FACTORY TEST

- The Generating set is load tested before dispatch
- All protective devices control functions and site load conditions are simulated. The generator and it's systems are checked before dispatch.

#### 10. EQUIPMENT FINISHING

All mild steel components are fully degreased and painted with powder coated paint to ensure maximum scuff resistance and durability.

#### 11. DOCUMENTATION

Operation & Maintenance manual, Circuit wiring diagrams and Commissioning / Fault Finding instruction leaflets are accompanied with the Generator.

#### 12. QUALITY STANDARDS

The equipment meets the following standards: BS4999, BS5000, BS5514 IEC 60034, VDE0530, NEMA MG 1.22 and ISO 8528.


#### 13. WARRANTY

All of the Generating Sets are covered under a warranty policy for a period of 12 months or 1000 working hours, Warranty of the equipment is in line with manufacturers warranty terms & conditions. (check warranty statement for more details, as it may vary for different countries)


In line with continuous product development, we reserve the right to change specifications without notice.


#### STANDARD GENERATOR DIMENSION AND WEIGHT

#### Silent Type (with Soundproof Canopy)





: +971 6 5570722





### Open Type (without Soundproof Canopy)

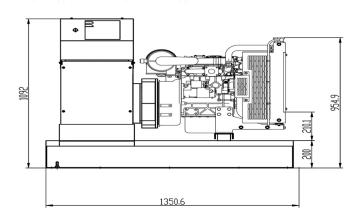



P.O.BOX: 122333 | F3-18, Sharjah Airport Free Zone (SAIF ZONE) | E-mail: info@upsgenerator.com Web.: www.upsgenerator.com